



PLATFORM SCALE type LMS

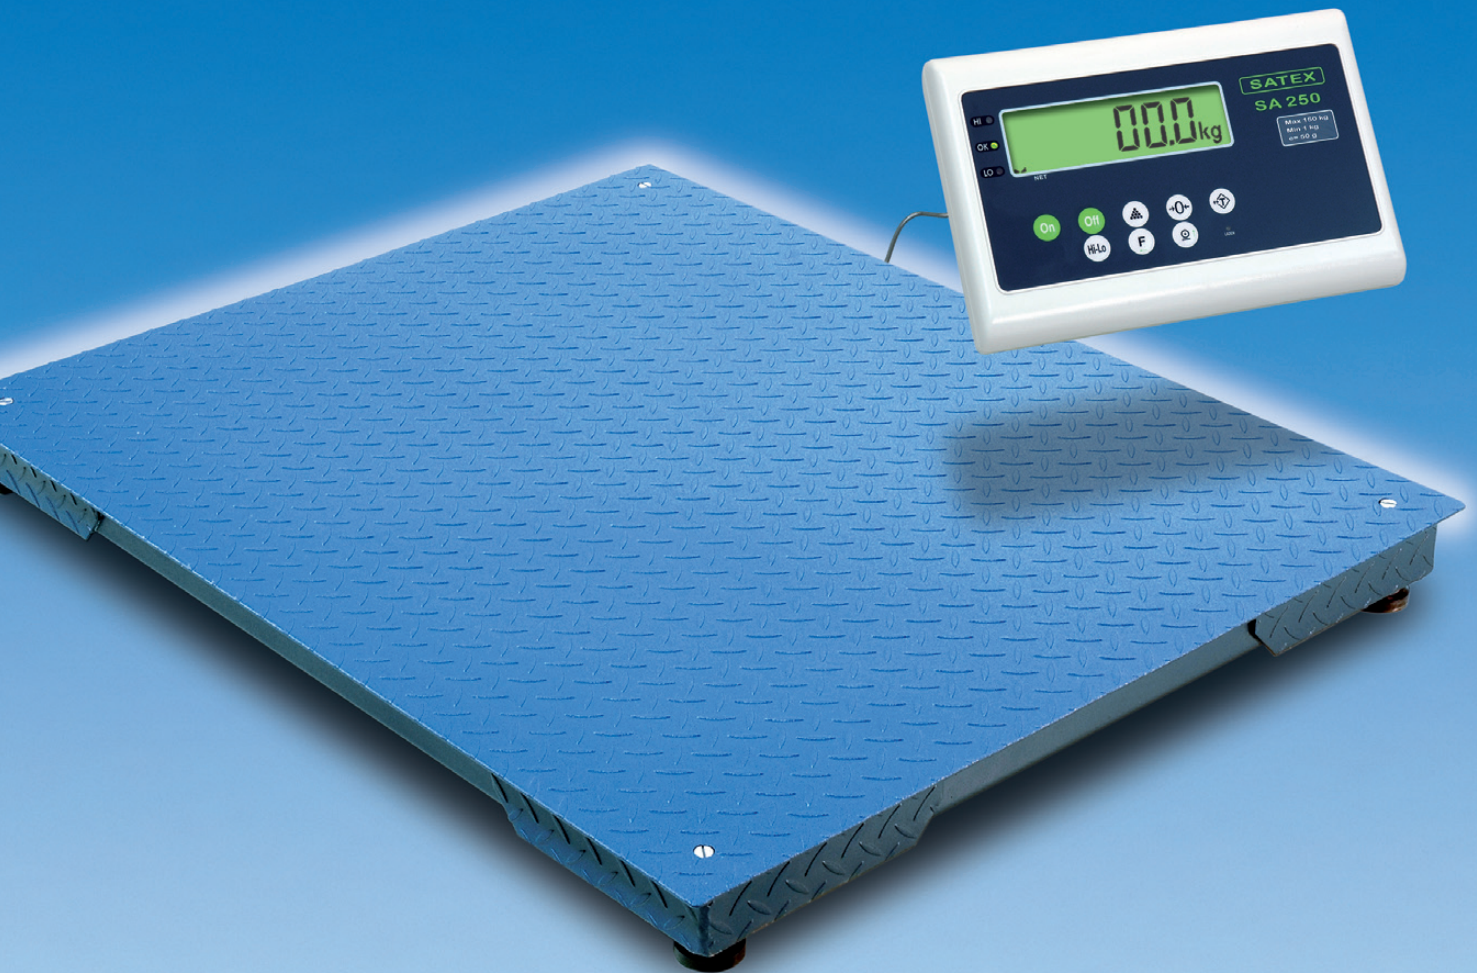


Model 1210 with one ramp

- ▶ 125 x 100 cm, 150 x 125 cm, 200 x 150 cm
- ▶ Weighing capacities 600 kg . . 4000 kg
- ▶ Safe overload 100 %
- ▶ Strong, steel coated construction
- ▶ 4 x IP 65 closed, nickle plated loadcells
- ▶ Printer / data output RS 232
- ▶ For internal weighing

SATEX

SATEX

- ▶ **Sturdy steel construction**
- ▶ **Large overload reserve**
- ▶ **High resolution versions**
- ▶ **RS232 data-printer output**
- ▶ **For internal weighing**
- ▶ **English manual**

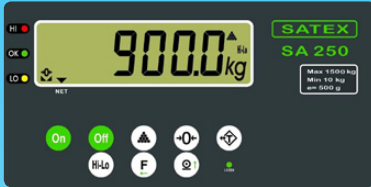


Display front with waterproof keys and back lit display figures




Display SA 250, table top model



Display SA 250 with wall mounting bracket

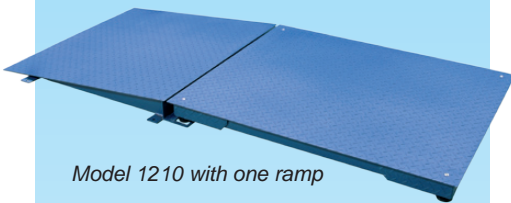

Model 1210 with one ramp



Ramp with coupling foot plates

READING

- Large and bright, 25 mm high LCD display figures with soft green back lighting
- Conversion speed 5 Hz
- Three separate LED's: Hi-OK-Low for check weighing with selectable weight margins
- 100 % tare range
- Optional wall mounting bracket
- Automatic zero track keeps the reading at zero if the scale is empty

CONSTRUCTION

Coated steel platform, with 5 mm thick upper plate and strengthening ribs on the downside, the electric cables are mounted inside the ribs, thus being protected from outside damage.

Four electronic loadcells down the corners with at least 100 % overload capacity. The loadcells are of the shearbeam type that gives a good protection against side impacts. The loadcells are based on the floor with leveling feet.

OPERATING KEYS

- on / off
- zero
- tare
- toggle: weighing - counting - check weighing
- piece counting
- check weighing
- data transmission

MENU FUNCTIONS (a.o.)

- Auto zero track : off - on
- Display lighting : off - on - auto
- Auto off scale : off - time selectable
- Check weighing : off - on
- Lock up weight : off - on
- Printing / data out : key - auto - continuous
- Calibration : 1 or 3 points adjustment

EXCITATION

Built in battery and charger for max. 14 hours stand alone operation. Supplied with 9/230 V adaptor included.

CERTIFICATION

For internal weighing.
For legal use for trade: see Soehnle model LM.

MODELS		TECHNICAL SPECIFICATIONS			
Order nr.	Platform size	Weighing capacity	Scale division		
			Standard	High Resolution	
1210 LMS 600	125 x 100 cm	600 kg	0.2 kg	0.1 kg	
1210 LMS 1500		1500 kg	0.5 kg	0.2 kg	
1210 LMS 2000		2000 kg	1 kg	0.5 kg	
1210 LMS 3000		3000 kg	1 kg	0.5 kg	
	height 10 cm				
1512 LMS 600	150 x 125 cm	600 kg	0.2 kg	0.1 kg	
1512 LMS 1500		1500 kg	0.5 kg	0.2 kg	
1512 LMS 2000		2000 kg	1 kg	0.5 kg	
1512 LMS 3000		3000 kg	1 kg	0.5 kg	
1512 LMS 4000		4000 kg	2 kg	1 kg	
	height 10 cm				
2015 LMS 600	200 x 150 cm	600 kg	0.2 kg	0.1 kg	
2015 LMS 1500		1500 kg	0.5 kg	0.2 kg	
2015 LMS 2000		2000 kg	1 kg	0.5 kg	
2015 LMS 3000		3000 kg	1 kg	0.5 kg	
	height 10 cm				
Ramps	wide 100 cm	for models 1210 LMS			
long 100 cm	wide 125 cm	for models 1210 and 1512 LMS			
	wide 150 cm	for models 1512 and 2015 LMS			

Verrijging • CSO Marketing Communicatie • Almere • 2007