
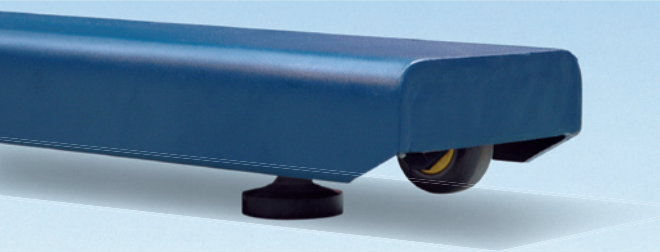


# PLATFORM SCALE type PLS

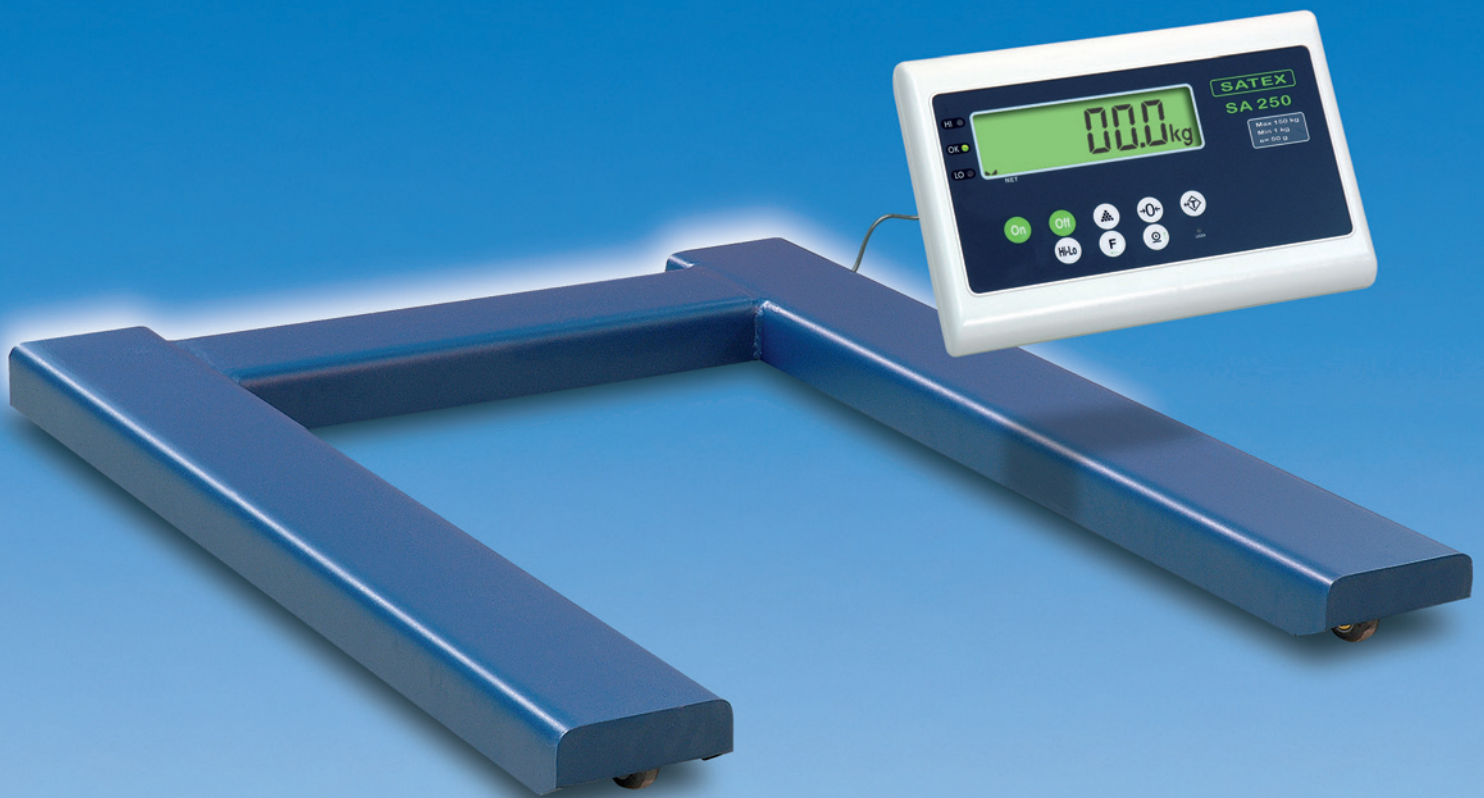

*Easy transportable with the wheels mounted inside the front ends*

- ▶ Weighing capacities 600 . . . 4000 kg
- ▶ Safe overload 100 %
- ▶ Transportable on its frontwheels
- ▶ Upright storage facility
- ▶ Strong, 8 mm steel frame
- ▶ 4 x IP 65 closed, nickle plated loadcells

**SATEX**

# SATEX

- ▶ **For internal weighing**  
(for legal trade, see: Soehnle PL)
- ▶ **Transportable**
- ▶ **Built in battery and charger**
- ▶ **Date - Printer output**
- ▶ **English manual**



Display front with waterproof keys and back lit display



Indicator SA 250, table top version



Indicator with wall mounting bracket



storage travel weighing

## TRANSPORTABLE U-SCALE: 120 x 92 CM

- Transportable on front end wheels
- Upright storage possible
- Special loadcells with high resistance against side impacts
- Overload protecting > 100%
- Long lasting high accuracy by its strong, 8 mm thick steel profiles
- 25 mm high, back lit display figures

### APPLICATION

Where an easy transportable scale is required, but yet with a high weighing capacity, the PLS is the right choice. Only 9,5 cm high and with capacities from 600 kg up to 4000 kg.

Ideal in combination with manual operated pallettrucks and easy to stow away.

This U-shaped scale is especially designed for weighing of Europallets and palletboxes (80 x 120 cm).

A derivate of this scale are the Satex weighbars type WBS with which both the separate bars may be placed on any required distance.

### ENVIRONMENT

Since the loadcells and junctionbox are IP 65 closed, the scale is fit to be used in dirty and dusty environment

### READING

Digital indicator with key functions:

- on / off
- zero
- check weighing
- toggle: weighing-counting-checkweighing
- piece counting
- tare
- printing

Built in battery and charger.



MODELS		TECHNICAL SPECIFICATIONS	
Order nr.	Platform size	Weighing capacity	Scale division
129 PLS 600	120 x 92 cm U - shape	600 kg	0.2 kg
129 PLS 1000		1000 kg	0.2 kg
129 PLS 1500		1500 kg	0.5 kg
129 PLS 2000		2000 kg	0.5 kg
129 PLS 3000	between the bars 100 x 60 cm	3000 kg	1 kg
129 PLS 4000		4000 kg	1 kg
<b>Accuracy</b>	≤ 1 scale division		
<b>Calibration</b>	Via the menu, using certified weight Class M1		
<b>Construction</b>	8 mm thick, coated steel frame with four IP 65 closed loadcells of 2000 kg each. Incorporated front wheels and tilting handle at the back. Steel front end allows for upright storage. All cables safely protected inside the steel frame.		
<b>Weight</b>	74 kg		
<b>Reading</b>	Digital indicator type SA 250, IP 54 closed, 25 mm high LCD figures with back lighting, 100% tare capacity, RS 232 data output, built in battery and charger for max 14 hours stand alone operation, 9/230 VAC mains adaptor included.		
<b>Auto off</b>	Automatic shut down of the scale if not used during a selectable time: off, 5, 10, 20, 30 minutes.		
<b>Excitation</b>	Mains adaptor 9/230 VAC or built in battery.		
<b>Certification</b>	For internal weighing For legal use for trade: see Soehnle model PL		